

Form PTO-1390

U.S. DEPARTMENT OF COMMERCE  
PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

P21470

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371U.S. APPLICATION NO. (If known, see 37 CFR  
1.5)

09/936516

INTERNATIONAL APPLICATION NO.

PCT/EP00/02250

INTERNATIONAL FILING DATE

14 March 2000

PRIORITY DATE CLAIMED

15 March 1999

TITLE OF INVENTION

DEVICE FOR DETERMINING THE CHARACTERISTICS OF A RUNNING MATERIAL

APPLICANT(S) FOR DO/EO/US


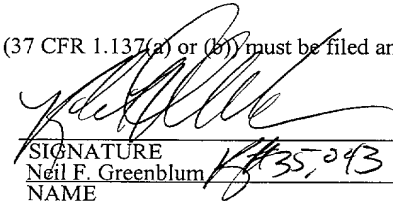
Markus OECHSLE and Frank WEGEHAUPT

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)).  
"With Declaration"
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3))
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).  
"Unexecuted"
10. ☒ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (U.S.C. 371(c)(5)).

Items 11 to 16 below concern other document(s) or information included:

11. ☒ Assignee: VOITH PAPER PATENT GmbH of Heidenheim, GERMANY
12. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
13. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
14. ☒ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ Figure of Drawing to be published
18. ☐ Other items or information:  
Cover Sheet and International Application as published in German.  
PCT/IPEA/416(in German).  
PCT/IPEA/409-with nine sheets of amended pages(in English and German).  
PCT/IPEA/408(in German).  
PCT/RO/101-PCT Request(in German).  
PCT/IB/306.  
PCT/IB/332.  
PCT/ISA/210(in English and German).  
Cover Letter Submitting Amended Pages of Application.  
Cover Letter under 35 USC 371 and 1.495.  
Claim of Priority.

U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <div style="font-size: 2em; font-weight: bold; margin-left: 100px;">09/936516</div>		INTERNATIONAL APPLICATION NO. PCT/EP00/02250		ATTORNEY'S DOCKET NUMBER P20470					
19. <u>    </u> The following fees are submitted:  <div style="margin-left: 40px;">           Basic National Fee (37 CFR 1.492(a)(1)-(5)):             Search report has been prepared by the EPO or JPO. . . . . \$ 860.00             International preliminary examination fee paid to USPTO (37 CFR 1.482). . . . . \$ 690.00             No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO(37 CFR 1.445(a)(2)). . . . . \$ 710.00             Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2) paid to USPTO. . . . . \$1,000.00             International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4). . . . . \$ 100.00   <div style="text-align: right;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div> </div>				<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:50%;">CALCULATIONS</th> <th style="width:50%;">PTO USE ONLY</th> </tr> <tr><td colspan="2" style="height: 100px;"></td></tr> </table>		CALCULATIONS	PTO USE ONLY		
CALCULATIONS	PTO USE ONLY								
Surcharge of \$130.00 for furnishing the oath or declaration later than <u>    </u> 20 <u>    </u> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%;">\$</td> <td style="width:50%;"></td> </tr> </table>		\$			
\$									
Claims	Number Filed	Number Extra	RATE						
Total Claims	32 - 20 =	12	X \$18.00	\$216.00					
Independent Claims	3 - 3 =	0	X \$80.00	\$0.00					
Multiple dependent claim(s) (if applicable)			+ \$270.00	\$0.00					
TOTAL OF ABOVE CALCULATIONS =				\$1076.00					
<u>    </u> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by $\frac{1}{2}$ .				<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%;">\$</td> <td style="width:50%;"></td> </tr> </table>		\$			
\$									
SUBTOTAL =				\$1076.00					
Processing fee of \$130.00 for furnishing the English translation later than <u>    </u> 20 <u>    </u> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%;">+</td> <td style="width:50%;"></td> </tr> </table>		+			
+									
Extension of Time fee in the amount of \$				<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%;"></td> <td style="width:50%;"></td> </tr> </table>					
TOTAL NATIONAL FEE =				\$1076.00					
Fee for recording the enclosed assignment (37 CFR 1.21(h). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%;">+</td> <td style="width:50%;"></td> </tr> </table>		+			
+									
TOTAL FEES ENCLOSED =				\$1076.00					
				Amount to be refunded	\$				
				Charged	\$				
a. <u>  X  </u> A check in the amount of \$1076.00 to cover the above fees is enclosed. b. <u>    </u> Please charge my Deposit Account No. <u>        </u> in the amount of \$ <u>        </u> to cover the above fees. c. <u>  X  </u> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>19-0089</u> .  NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.  <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">           SEND ALL CORRESPONDENCE TO CUSTOMER NO. 7055            AT THE PRESENT ADDRESS OF:            Neil F. Greenblum            GREENBLUM &amp; BERNSTEIN, P.L.C.            1941 Roland Clarke Place            Reston, VA 20191            (703) 716-1191         </div> <div style="width: 10%; text-align: center;">   <div style="font-size: 1.5em; font-weight: bold;">07055</div> <div style="font-size: 0.8em;">PATENT TRADEMARK OFFICE</div> </div> <div style="width: 40%;"> <div style="text-align: right;">             SIGNATURE            Neil F. Greenblum            NAME         </div> <div style="text-align: right; margin-top: 10px;"> <u>28,394</u>            REGISTRATION NUMBER         </div> </div> </div>									

P21470.A01

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants :	Markus OECHSLE et al.	)	
		)	PCT Branch
Appln. No. :	Not yet assigned -- U.S. National	)	
	Stage of PCT/EP00/02250	)	
		)	
Filed :	March 14, 2000	)	
		)	
For :	DEVICE FOR DETERMINING THE	)	
	CHARACTERISTICS OF A RUNNING	)	
	MATERIAL	)	

**PRELIMINARY AMENDMENT AND COVER LETTER  
SUBMITTING AMENDED PAGES OF APPLICATION**

Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Sir:

Enclosed please find a copy of the International Preliminary Examination Report - Form PCT/IPEA/409 (hereinafter "Report"), and an English translation thereof, which was drawn on pages of description 1- 15 and the drawings as originally filed, and claims 1 - 32 as filed on February 14, 2001, and includes as an Annex amended claims 1 - 32 (in German and English).

Based upon the submission of amended claims, Applicants respectfully request examination on the merits of the application containing amended claims 1 - 32 (in place of originally filed claims 1 - 30).

Additionally, prior to the examination of the above-identified application including replacement claims 1 - 32, amendment of claims 3 - 29, as follows, is respectfully requested to remove multiple dependent claims.

**IN THE CLAIMS**

*Please amend the claims as follows (Marked-up copies of the amended claims are attached to the Appendix):*

3. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is simultaneously able to carry out a plurality of movements each corresponding to one degree of freedom.
4. (Amended) Apparatus in accordance with claim 1, characterised in that movements of the measuring device (1) each corresponding to a degree of freedom can be carried out one after the other timewise.
5. (Amended) Apparatus in accordance with claim 1, characterised in that the measuring device (10) is movable along two longitudinal axes (x, y, z) preferably extending perpendicular to one another.
6. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is movable along three longitudinal axes (x, y, z) which preferably respectively extend pair-wise perpendicular to one another.
7. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is movable in the longitudinal direction of the material web (11) perpendicular to the direction of movement of the web and/or vertically.
8. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is movable by the execution of a plurality of linear movements, preferably two or three linear movement respectively extending pair-wise

perpendicular to one another, along a curve in space which can be preset as desired.

9. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is rotatable about two axes (x, y, z) which preferably extend perpendicular to one another.
10. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is rotatable about three axes (x', y', z') which preferably respectively extend pair-wise perpendicular to one another.
11. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) can be oriented in any desired manner in space by executing a plurality of rotary movements, preferably two or three rotary movements about axes (x', y', z') which extend perpendicular to one another.
12. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) can be moved along any desired presettable curve in space and can be oriented in any desired manner in space by executing a plurality of linear movements and rotary movements which take place simultaneously and/or after one another timewise.
13. (Amended) Apparatus in accordance with claim 1,  
characterised in that the orientation of at least one longitudinal axis (x, y, z) of the measuring device (10) in space can be changed.
14. (Amended) Apparatus in accordance with claim 1,  
characterised in that the orientation of at least one rotational axis (x', y', z') of the measuring

device (10) can be changed in space.

15. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is movable relative to a stationary frame or beam.
16. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is attached, in particular movably attached, to a frame (12) or beam (19, 22, 28, 36) movable relative to a machine.
17. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is movably attached to the machine.
18. (Amended) Apparatus in accordance with claim 1,  
characterised in that it is provided in the form of a mobile unit which can be used at different positions of a machine.
19. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is movable via a joint (14), in particular a ball joint, which enables a pivotal movement in at least one plane.
20. (Amended) Apparatus in accordance with claim 1,  
characterised in that at least one measurement location is provided compatible with a plurality of different measuring devices (10), in particular measuring devices provided in the form of exchangeable measuring heads.
21. (Amended) Apparatus in accordance with claim 1,  
characterised in that a plurality of measuring devices (10), in particular provided in the form

of interchangeable measuring heads, can be combined into one unit.

22. (Amended) Apparatus in accordance with claim 1,  
characterised in that at least one measurement location compatible with different measuring devices (10) and/or a plurality of measuring devices (10, which are in particular interchangeable, are provided for the detection of data relating to different measured parameters.
23. (Amended) Apparatus in accordance with claim 1,  
characterised in that at least one common operation unit, in particular a control unit, drive unit, supply unit, data detection unit and/or evaluation unit, is associated with the measuring devices (10).
24. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is attached to a frame (12) which preferably extends transverse to the web running direction beneath the machine or over the machine, in particular in the region of a dryer cylinder (16) and/or a dryer roll (42) of a paper making machine which is preferably supported on both sides of the machine.
25. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is attached to a beam (13) which preferably projects in the vertical direction or transverse to the web running direction into the machine, in particular into the dryer section of a paper making machine.
26. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is movable beneath the machine, in particular

in the cellar of a dryer section of a paper making machine.

27. (Amended) Apparatus in accordance with claim 1,  
characterised in that a protective device is provided which protects the measuring device  
(10), in particular from downwardly falling articles, and which is preferably formed by a  
scraper (44) and/or a sheet metal shield (46).
28. (Amended) Apparatus in accordance with claim 1,  
characterised in that an electrical, pneumatic and/or hydraulic drive is provided for the  
measuring device (10).
29. (Amended) Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is manually movable.


**REMARKS**

Entry of the foregoing replacement sheets and amendment to the claims upon which the  
International Preliminary Examination Report is based is respectfully requested.



Should there be any questions, the Examiner is invited to contact the undersigned at the below listed number.

Respectfully submitted,  
Markus OECHSLE et al.

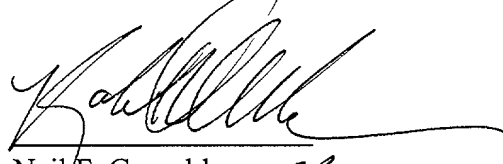

Neil F. Greenblum  
Reg. No. 28,394 *2835043*

September 14, 2001  
GREENBLUM & BERNSTEIN, P.L.C.  
1941 Roland Clarke Place  
Reston, VA 20191  
(703) 716-1191

**APPENDIX**

***Marked-Up Copies of the Amended Claims:***

3. (Amended) Apparatus in accordance with claim 1 [or claim 2],  
characterised in that the measuring device (10) is simultaneously able to carry out a plurality  
of movements each corresponding to one degree of freedom.
4. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1,  
characterised in that movements of the measuring device (1) each corresponding to a degree  
of freedom can be carried out one after the other timewise.
5. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1,  
characterised in that the measuring device (10) is movable along two longitudinal axes (x,  
y, z) preferably extending perpendicular to one another.
6. (Amended) Apparatus in accordance with [at least one of the claims 1 to 4] claim 1,  
characterised in that the measuring device (10) is movable along three longitudinal axes (x,  
y, z) which preferably respectively extend pair-wise perpendicular to one another.
7. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1,  
characterised in that the measuring device (10) is movable in the longitudinal direction of the  
material web (11) perpendicular to the direction of movement of the web and/or vertically.
8. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1,  
characterised in that the measuring device (10) is movable by the execution of a plurality of  
linear movements, preferably two or three linear movement respectively extending pair-wise  
perpendicular to one another, along a curve in space which can be preset as desired.

9. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the measuring device (10) is rotatable about two axes (x, y, z) which preferably extend perpendicular to one another.
10. (Amended) Apparatus in accordance with [at least one of the claims 1 to 8] claim 1, characterised in that the measuring device (10) is rotatable about three axes (x', y', z') which preferably respectively extend pair-wise perpendicular to one another.
11. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the measuring device (10) can be oriented in any desired manner in space by executing a plurality of rotary movements, preferably two or three rotary movements about axes (x', y', z') which extend perpendicular to one another.
12. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the measuring device (10) can be moved along any desired presettable curve in space and can be oriented in any desired manner in space by executing a plurality of linear movements and rotary movements which take place simultaneously and/or after one another timewise.
13. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the orientation of at least one longitudinal axis (x, y, z) of the measuring device (10) in space can be changed.
14. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the orientation of at least one rotational axis (x', y', z') of the measuring device (10) can be changed in space.

15. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the measuring device (10) is movable relative to a stationary frame or beam.
16. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the measuring device (10) is attached, in particular movably attached, to a frame (12) or beam (19, 22, 28, 36) movable relative to a machine.
17. (Amended) Apparatus in accordance with [at least one of the claims 1 to 14] claim 1, characterised in that the measuring device (10) is movably attached to the machine.
18. (Amended) Apparatus in accordance with [at least one of the claims 1 to 14] claim 1, characterised in that it is provided in the form of a mobile unit which can be used at different positions of a machine.
19. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the measuring device (10) is movable via a joint (14), in particular a ball joint, which enables a pivotal movement in at least one plane.
20. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that at least one measurement location is provided compatible with a plurality of different measuring devices (10), in particular measuring devices provided in the form of exchangeable measuring heads.
21. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that a plurality of measuring devices (10), in particular provided in the form of interchangeable measuring heads, can be combined into one unit.

22. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that at least one measurement location compatible with different measuring devices (10) and/or a plurality of measuring devices (10, which are in particular interchangeable, are provided for the detection of data relating to different measured parameters.
23. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that at least one common operation unit, in particular a control unit, drive unit, supply unit, data detection unit and/or evaluation unit, is associated with the measuring devices (10).
24. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the measuring device (10) is attached to a frame (12) which preferably extends transverse to the web running direction beneath the machine or over the machine, in particular in the region of a dryer cylinder (16) and/or a dryer roll (42) of a paper making machine which is preferably supported on both sides of the machine.
25. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the measuring device (10) is attached to a beam (13) which preferably projects in the vertical direction or transverse to the web running direction into the machine, in particular into the dryer section of a paper making machine.
26. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the measuring device (10) is movable beneath the machine, in particular in the cellar of a dryer section of a paper making machine.

27. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that a protective device is provided which protects the measuring device (10), in particular from downwardly falling articles, and which is preferably formed by a scraper (44) and/or a sheet metal shield (46).
28. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that an electrical, pneumatic and/or hydraulic drive is provided for the measuring device (10).
29. (Amended) Apparatus in accordance with [at least one of the preceding claims] claim 1, characterised in that the measuring device (10) is manually movable.

WO 00/55422

PCT/EP00/02250

3/pr 1/2

DEVICE FOR DETERMINING THE CHARACTERISTICS  
OF A RUNNING MATERIAL WEB

The invention relates to an apparatus for the determination of characteristics of a running material web and/or of a machine for its manufacture and/or refinement, in particular for use in paper making machines, preferably in the dryer sections of paper making machines, with at least one measuring device.

For the optimisation of the manufacturing process of material webs, in particular of paper webs, it is desirable to know the operating state, for example of a paper making machine, and also its behaviour on changes of the machine settings as well as possible. For this purpose mathematical models are also used which describe the entire paper making machine or individual sections of the paper manufacture. For the optimisation of such models and also for the control or regulation of the individual devices used in the manufacturing process, for example in a dryer section of a paper making machine, measuring devices are used in order to collect data which relate to different measured parameters, for example the moisture content of a paper web or the surface temperature of dryer cylinders. These data can serve as a basis for the models which describe the manufacturing and/or refinement process and be made available to control or regulating units by which the conditions at individual machine sections can be changed, for example by controlling corresponding setting members.

WO 00/55422

PCT/EP00/02250

2

Stationary measuring devices are known, with which spatially fixed measurements can be carried out with respect to one measured parameter at one measurement location, as well as scanners which include a sensor movable transverse to the web running direction.

It is the problem (object) underlying the present invention to provide an apparatus of the initially named kind which can be used as universally and variably as possible and which can also be used at paper making machines.

The solution to this problem takes place through the features of claim 1 and in particular in that the measuring device has at least two degrees of freedom of movement respectively corresponding to a rotary movement or a linear movement for the detection of data relating to at least one measured parameter at a plurality of measurement locations.

Degrees of freedom of movement or degrees of freedom are used here to describe movements of the measuring device which can each not be produced by combinations of other movements respectively corresponding to one degree of freedom. Through the invention an apparatus is provided with a measuring device which can be moved in diverse manner and which can be ideally aligned as a result of its mobility with the individual measurement locations, and in particular can be used in regions of the paper making machine to which access is difficult, for example between the dryer cylinders of a dryer section of the paper making machine. The provision of a plurality of degrees of freedom makes it possible to intentionally so align the measuring device or a sensor of the measuring



WO 00/55422

PCT/EP00/02250

3

device that different measurement locations can be targeted one after the other which can, for example, not be reached with a scanner which is only movable along a straight line. The material web or machine to be investigated can be scanned with the measuring device of the invention also following any desired irregular pattern by investigating measurement locations distributed irregularly over the material web, the machine and/or the environment of the material web or machine one after the other. The investigation of the environment relates in this respect for example to the detection of data concerning a measured parameter which relates to a characteristic value of the air, for example its temperature or moisture, or of an air flow, for example its direction or speed, in the region of the material web or of the machine. The provision in accordance with the invention of a plurality of degrees of freedom also makes it possible to position the measuring device in two steps by it first being moved, for example by a linear movement, into the vicinity of the respective measurement location and by it being orientated, subsequent to this coarse adjustment, as part of a fine adjustment, for example, by a rotary movement such that the respective measurement location is precisely targeted. Each measurement location can thus be moved to quickly and nevertheless with a high precision, and in particular in a reproducible manner, by an appropriate design of the drive of the measuring device.

In accordance with a preferred embodiment of the invention, the measuring device is movable during the measurement and in particular without interruption of the data detection.

WO 00/55422

PCT/EP00/02250

4

In this way, profiles of the respective measured parameter having any shape can be recorded at the material web or at the machine, and indeed in particular also transverse profiles and profiles in the longitudinal direction of the material web or in the direction of the machine or the process.

In accordance with a further preferred embodiment of the invention, the measuring device is simultaneously able to carry out a plurality of movements each corresponding to one degree of freedom.

The versatility of the measuring device of the invention is further increased in this manner. The measuring device can also already be pre-set within the framework of a coarse adjustment during the moving towards each measurement location to be investigated such that the subsequent fine adjustment only requires very little time.

In accordance with a further preferred embodiment of the invention, the measuring device is movable along three longitudinal axes preferably extending perpendicular to one another.

In this way, each point of a Cartesian coordinate system can be moved to with the measuring device, with the measuring device, in a particularly preferred variant, being movable in the longitudinal direction of the material web, perpendicular to the direction of movement of the web and in a vertical direction.

:

:

WO 00/55422

PCT/EP00/02250

5

In a further preferred variant, the measuring device can additionally be rotatable about three axes which preferably extend perpendicular to one another, with the rotational axes being able to coincide with the three longitudinal axes which extend pair-wise perpendicular to one another. In this way, a measuring device having six degrees of freedom is provided which is characterised by a particularly high movement ability and thus versatility.

The measuring device can also have degrees of freedom corresponding exclusively to each rotary movement, also without the possibility of linear movements, and be rotatably mounted, for example, about two or three rotational axes which each stand pair-wise perpendicular on one another.

In accordance with a further preferred embodiment of the invention, the orientation of at least one longitudinal axis and/or rotational axis of the measuring device can be changed in space. This can be realised, for example, in that the measuring device is attached to a beam or frame which is movable relative to the material web or the machine in order to change in this way the location of a track or of a joint for the measuring device and thus the respective longitudinal or rotational axis in space.

It is also possible to movably attach the measuring device directly to the machine without such beams or frames.

Furthermore, the measuring device can be provided in the form of a mobile unit which can be used at different positions of a machine. Such a

WO 00/55422

PCT/EP00/02250

6

measuring device can in particular be used for corrective measurements, for example for defect or error location.

In accordance with a further preferred embodiment of the invention, the measuring device is movable via a joint, in particular via a ball joint, which enables a pivotal movement in at least one plane.

A particularly good movability of the measuring device results in this way. A ball joint allows the carrying out of pivotal or rotational movements about a plurality of axes in simple manner. A measuring device which can be used in particularly versatile manner can be provided simply by a combination of the pivotal or rotational movements enabled by means of the joint with a single linear movement.

In accordance with a further preferred embodiment of the invention, a plurality of measuring devices, in particular provided in the form of interchangeable measuring heads, can be combined into one unit.

The measuring devices can, for example, be attached to a common frame or beam via which the individual measuring devices can be connected to a common control unit, drive unit, supply unit, data detection unit and/or evaluation unit. A particularly efficient utilisation of the individual components results in this manner. The investigation of the material web or of the machine with respect to different measured parameters can take place by the simultaneous use of measuring devices of different design or by the use of interchangeable measuring devices or measuring heads. For this purpose, the frame or the beam, to which the interchangeable

measuring devices or measuring heads can be attached, is preferably provided with at least one measuring location compatible with the individual measuring devices.

In accordance with a further preferred embodiment of the invention, the measuring device is attached to a frame which preferably extends transverse to the web running direction beneath the machine or over the machine and which is preferably supported on both sides of the machine.

In this manner, the measuring device can be moved, for example in the manner of a hangar crane, beneath or above the dryer section of a paper making machine in order, for example, to scan a dryer cylinder of the dryer section, with the measuring device being used as a service device for fast and simple diagnostic measurements in particular at new machines.

If, in accordance with a preferred variant, the frame is movable in the running direction of the material web or in the direction of the machine or the process, data can be collected about a plurality of dryer cylinders arranged in series. The measuring device can additionally be movable in the vertical direction and, for this purpose, be arranged for example at the free end of a beam extending in the vertical direction. The measuring device can in this way, for example, be raised or lowered into intermediate spaces between dryer cylinders spaced in the machine direction.

The solution of the problem underlying the invention also takes place by the features of the independent claim 29 and in particular in that the measuring device is rotatable about an axis at a plurality of measurement

locations for the detection of data relating to at least one measured parameter.

Such a measuring device can, for example, be attached to a beam projecting in the vertical direction or transversely to the web running direction into a machine, for example into intermediate spaces between suction rolls or dryer cylinders. In this manner, a plurality of measurement locations at the material web or at the machine can be investigated without having to move the beam relative to the machine or to linearly move the measuring device relative to the beam.

Generally any kind of measuring apparatus can be used as the measuring device with which the material web, the machine or the environment can be investigated with respect to at least one parameter relevant to the manufacturing or refining process. Possibilities include, for example, sensors working with visible, for example, polarised, light, sensors generally designed for the emission and for the reception of electromagnetic radiation, for example IR sensors, sensors working with electrically charged particles, measuring devices equipped with temperature sensors, moisture sensors or devices for the investigation of air flows. The measured parameters with respect to which, for example, a paper web, the dryer cylinders and/or dryer sieves can be investigated in dryer sections of paper making machines are, for example, the thickness, the temperature or the moisture content of the material web or the paper web, the temperature and/or the dew point of the dry air used to dry the material web, the temperature prevailing at or in the region of the surface of the dryer cylinders of a paper making machine, the permeability at

WO 00/55422

PCT/EP00/02250

9

dryer sieves, the speed of air flows present in particular at the surface of dryer sieves or the humidity at the individual machine components or at certain locations of the material web.

Further preferred embodiments of the invention are set forth in the dependent claims, in the description and in the drawing.

The invention is described in the following by way of example with reference to the drawing. There are shown:

- Figs. 1 and 2      perspective schematic illustrations in each case of a measuring apparatus in accordance with an embodiment of the invention having a plurality of degrees of freedom;
- Fig. 3            a schematic side view of a measuring apparatus in accordance with a further embodiment of the invention used at dryer cylinders of a drying section in a paper making machine;
- Fig. 4            a schematic view in the machine direction of a measuring apparatus in accordance with a further embodiment of the invention used at a dryer cylinder;
- Fig. 5            a schematic side view of a measuring apparatus in accordance with a further embodiment of the invention

WO 00/55422

PCT/EP00/02250

10

used in a dryer section of a paper making machine and protected by a protective device.

In Fig. 1, a measuring device 10 of an apparatus of the invention which is attached to a frame 12 shown schematically in Fig. 1 is indicated by a parallelepiped. The frame 12 includes a cross member 18 serving as a beam which extends over a paper making machine (not shown) and is supported at the base at both sides of the machine via support elements 20.

The measuring device 10 is attached to the free end of a vertically extending beam 19 which is coupled to the cross member 18.

The cross member 18 is movable relative to the support elements 20 in the running direction of the material web or in the direction  $x$  of the machine or process. It is also possible to provide support elements 20 movable in the  $x$  direction to which the cross member 18 is fixedly connected. The vertical beam 19 is in turn movable relative to the cross member 18 in a transverse direction  $y$  extending perpendicular to the machine direction  $x$ . The vertical beam 19 is also movable in the direction of its longitudinal extent relative to the cross member 18, so that the measuring device 10 can in this way be moved in the vertical direction  $z$ . It is also possible to provide a vertical beam 19 rigidly connected to the cross member 18 and a measuring device 10 movable relative thereto and thus in the  $z$  direction.

The arrangement explained above enables the measuring device to be moved to and fro in directions  $x$ ,  $y$ ,  $z$  extending in each case pair-wise



perpendicular to one another and thus to be positioned at any location in space.

Furthermore, the measuring device 10 is attached to the beam 19 via a joint 14, for example a ball joint, and rotatable about three rotational axes  $x'$ ,  $y'$ ,  $z'$  each extending pair-wise perpendicular to one another, and indeed each in both directions and about at least almost  $360^\circ$ , as indicated by arrows  $\alpha$ ,  $\beta$ ,  $\gamma$  in Fig. 1. In the embodiment shown, a rotational axis  $z'$  coincides with the vertical direction  $z$  defined by the vertical beam 19, whereas the two other rotational axes  $x'$ ,  $y'$  are each offset parallel to the corresponding longitudinal directions  $x$ ,  $y$ .

The rotation of the measuring device 10 about the vertical axis  $y'$  or  $y$  can take place by the rotational mounting of the measuring device 10 at the vertical beam 19 or by rotation of the vertical beam 19 about its own longitudinal axis.

The measuring device 10 of Fig. 1 has six degrees of freedom with the three linear movements and the three rotational movements and can thus be moved to any point in space, on the one hand, and oriented anywhere in space at this point, on the other hand.

Fig. 2 shows a measuring device 10 which likewise has six degrees of movement freedom and which is movable along longitudinal axes  $x$ ,  $y$ ,  $z$  oriented in accordance with Fig. 1 and each extending pair-wise perpendicular to one another. In contrast to the embodiment of Fig. 1, the measuring device 10 is attached to the free end of a beam or boom 22

extending in the transverse direction  $y$  via a joint 14, for example a ball joint, such that the measuring device 10 can be rotated about rotational axes  $x'$ ,  $y'$ ,  $z'$  likewise oriented in accordance with Fig. 1 and each extending pair-wise perpendicular to one another. In this embodiment, the rotational axis  $y'$  coincides with the longitudinal axis  $y$  of the boom 22 extending transversely to the web running direction or the direction  $x$  of the machine or process.

The boom 22 is coupled to a vertical beam 24 and is movable in the direction of its longitudinal extent  $y$  relative to the beam 24. It is also possible to provide a rigid connection between the boom 22 and the vertical beam 24 and to provide the measuring device 10 movably along the boom 22.

The lower end of the vertical beam 24 is connected to a support element 26 extending in the machine direction  $x$ . The movability of the measuring device 10 in the  $x$  direction can be realised by moving the support element 26 in the  $x$  direction or by moving the vertical beam 24 along the support element 26.

With the embodiment of Fig. 2, a crane-like frame 12 is provided whose free end, which bears the measuring device 10, can be moved to any point in space to which the measuring device 10 can be oriented anywhere in space by turning about the axes  $x'$ ,  $y'$ ,  $z'$  in each case by at least almost  $360^\circ$ .

Fig. 3 shows the use of an apparatus of the invention which has a measuring device 10, which is attached to a frame 12 and likewise has six degrees of freedom, in a dryer section of a paper making machine, with the measuring device 10 being located beneath a row of dryer cylinders 16 which are arranged in offset manner and around which a paper web 11 to be dried is guided.

The measuring device 10 is attached to a joint 14, formed for example as a ball joint, which allows a rotation or pivoting of the measuring device 10 about rotational axes which can generally be oriented anywhere in space.

The joint 14 is connected to a cross member 28 serving as a beam which extends in the transverse direction  $y$  perpendicular to the direction  $x$  of the machine or process and is movable relative to the measuring device 10 attached to the joint 14. The cross member 28 in this manner forms a traversing track for the measuring device 10.

The cross member 28 is attached to a vertical beam 30 which extends in the vertical direction  $z$  and is movable in the vertical direction  $z$  in order to provide a vertical movement of the measuring device 10 in this manner.

The vertical beam 30 is movable along a support element 32 which extends in the machine direction  $x$  and which thus represents a track carrier enabling movements of the measuring device 10 in the machine direction  $x$ . The measuring device 10 can in this way be moved to and fro between the dryer cylinders 16 spaced in the machine direction  $x$ , as is

indicated by the arrangement illustrated only in outline in the right hand part of Fig. 3.

It can be seen from Fig. 3 that, for example, by a simultaneous movement of the measuring device 10 in the machine direction x and in the vertical direction z and by a rotation of the measuring device 10 about a rotational axis extending in the transverse direction y, a dryer cylinder 16 can be scanned such that a constant spacing is observed between the cylinder surface and the side of the measuring device 10 confronting the dryer cylinder 16.

Fig. 4 shows a measuring device 10 which is attached to a frame 12 formed in accordance with Fig. 2 and which likewise has six degrees of freedom for the carrying out of measurements at a dryer cylinder 16. The frame 12 can be installed at the operator side or the drive side of the paper making machine. The measuring device 10 is attached to a joint 14, provided for example in the form of a ball joint, and is arranged suspended from a beam or boom 36 such that the free end of the measuring device 10 is located in the vicinity of the cylinder surface.

In accordance with the embodiment of Fig. 2, the boom 36 is movable relative to a vertical beam 38 which is in turn movable relative to a support element 40 fixedly connected to the base 34 also serving for the support of the dryer cylinder 16.

In accordance with the invention, the measuring device 10 can also be attached directly to the respective machine without a frame 12, as is

illustrated for example in the embodiments of Figs. 1 to 4, and be movably mounted in the manner of the invention.

In Fig. 5, the measuring device 10, which corresponds for example with respect to its travel and movement capability to a measuring device described above in connection with Figs. 1 to 4 and which is movably attached to a cross member 28, serves for the investigation of the relationships at a suction roll 42 of a dryer section of a paper making machine.

The measuring device 10 is located beneath a dryer cylinder 16 at which a scraper 44 is arranged. A protective device formed by a sheet metal shield 46 is provided for the protection of the measuring devices 10 against paper or paper residues detached from the dryer cylinder 16 by means of the scraper 44. The measuring device 10 is protected from above by the sheet metal shield 46 without impairing the measurements carried out by means of a measuring region 10a confronting the suction roll 42. The sheet metal shield 46 can be fixedly attached to the machine and extend along the whole movement region of the measuring device 10. It is also possible to mount the sheet metal shield 46 or another protective device to the movable measuring device 10.

Furthermore, a correspondingly designed scraper 44 can alternatively or additionally serve as a protective device for the measuring device 10 and, for example, be provided with a downwardly extending metal sheet which shields the measuring device 10 from downwardly falling articles.

The measuring device 10 is also protected in the case of a web tear by a protective device of the kind described above.

---

PCT/EP00/02250

S 7474 - Ku/Ho

Voith Sulzer Papiertechnik

Patent GmbH

5

**New patent claims**

1. Apparatus for determining characteristics of a running material web  
(11) and/or of a machine for its manufacture and/or refinement, in  
particular for use in paper making machines, preferably in dryer  
sections of paper making machines, comprising at least one  
measuring device (10) which has at least two degrees of freedom of  
movement respectively corresponding to a rotary movement or a  
linear movement for the detection at a plurality of measurement  
locations of data relating to at least one measured parameter and  
means to detect data about at least one of the following measured  
parameters:

a) measured parameters which relate to a characteristic value of the  
air, in particular its temperature or moisture, or an air flow, in  
particular its direction or speed, in the region of the material web or  
of the machine; and

b) measured parameters such as the thickness, the temperature or  
the moisture content of the material web or paper web, the  
temperature and/or the dew point of the dry air used to dry the  
material web, the temperature prevailing at or in the region of the  
surface of the dryer cylinder of a paper making machine, the  
permeability at dryer sieves, the speed of air flows present in  
particular at the surface of dryer sieves or the air humidity at

the individual machine components or at certain locations of the material web.

- 5    2.    Apparatus in accordance with claim 1,  
characterised in that the measuring device (10) is movable during  
the measurement and in particular without interruption of the data  
detection.
- 10   3.    Apparatus in accordance with claim 1 or claim 2,  
characterised in that the measuring device (10) is simultaneously  
able to carry out a plurality of movements each corresponding to  
one degree of freedom.
- 15   4.    Apparatus in accordance with at least one of the preceding claims,  
characterised in that movements of the measuring device (10) each  
corresponding to a degree of freedom can be carried out one after  
the other timewise.
- 20   5.    Apparatus in accordance with at least one of the preceding claims,  
characterised in that the measuring device (10) is movable along two  
longitudinal axes (x, y, z) preferably extending perpendicular to one  
another.
- 25   6.    Apparatus in accordance with at least one of the claims 1 to 4,  
characterised in that the measuring device (10) is movable along  
three longitudinal axes (x, y, z) which preferably respectively extend  
pair-wise perpendicular to one another.



7. Apparatus in accordance with at least one of the preceding claims, characterised in that the measuring device (10) is movable in the longitudinal direction of the material web (11) perpendicular to the direction of movement of the web and/or vertically.
8. Apparatus in accordance with at least one of the preceding claims, characterised in that the measuring device (10) is movable by the execution of a plurality of linear movements, preferably two or three linear movements respectively extending pair-wise perpendicular to one another, along a curve in space which can be preset as desired.
9. Apparatus in accordance with at least one of the preceding claims, characterised in that the measuring device (10) is rotatable about two axes (x, y, z) which preferably extend perpendicular to one another.
10. Apparatus in accordance with at least one of the claims 1 to 8, characterised in that the measuring device (10) is rotatable about three axes (x', y', z') which preferably respectively extend pair-wise perpendicular to one another.
11. Apparatus in accordance with at least one of the preceding claims, characterised in that the measuring device (10) can be oriented in any desired manner in space by executing a plurality of rotary movements, preferably two or three rotary movements about axes (x', y', z') which extend perpendicular to one another.
12. Apparatus in accordance with at least one of the preceding claims,

characterised in that the measuring device (10) can be moved along any desired presettable curve in space and can be oriented in any desired manner in space by executing a plurality of linear  
5 movements and rotary movements which take place simultaneously and/or after one another timewise.

13. Apparatus in accordance with at least one of the preceding claims,  
10 characterised in that the orientation of at least one longitudinal axis (x, y, z) of the measuring device (10) in space can be changed.

14. Apparatus in accordance with at least one of the preceding claims,  
15 characterised in that the orientation of at least one rotational axis (x', y', z') of the measuring device (10) can be changed in space.

15. Apparatus in accordance with at least one of the preceding claims,  
characterised in that the measuring device (10) is movable relative to a stationary frame or beam.

20 16. Apparatus in accordance with at least one of the preceding claims, characterised in that the measuring device (10) is attached, in particular movably attached, to a frame (12) or beam (19, 22, 28, 36) movable relative to a machine.

25 17. Apparatus in accordance with at least one of the claims 1 to 14, characterised in that the measuring device (10) is movably attached to the machine.

18. Apparatus in accordance with at least one of the claims 1 to 14, characterised in that it is provided in the form of a mobile unit which can be used at different positions of a machine.

5

19. Apparatus in accordance with at least one of the preceding claims, characterised in that the measuring device (10) is movable via a joint (14), in particular a ball joint, which enables a pivotal movement in at least one plane.

10

20. Apparatus in accordance with at least one of the preceding claims, characterised in that at least one measurement location is provided compatible with a plurality of different measuring devices (10), in particular measuring devices provided in the form of exchangeable measuring heads.

15

21. Apparatus in accordance with at least one of the preceding claims, characterised in that a plurality of measuring devices (10), in particular provided in the form of interchangeable measuring heads, can be combined into one unit.

20

22. Apparatus in accordance with at least one of the preceding claims, characterised in that at least one measurement location compatible with different measuring devices (10) and/or a plurality of measuring devices (10), which are in particular interchangeable, are provided for the detection of data relating to different measured parameters.

25

23. Apparatus in accordance with at least one of the preceding claims,  
characterised in that at least one common operating unit, in  
particular a control unit, drive unit, supply unit, data detection unit  
and/or evaluation unit, is associated with the measuring devices  
(10).
24. Apparatus in accordance with at least one of the preceding claims,  
characterised in that the measuring device (10) is attached to a  
frame (12) which preferably extends transverse to the web running  
direction beneath the machine or over the machine, in particular in  
the region of a dryer cylinder (16) and/or a dryer roll (42) of a paper  
making machine which is preferably supported on both sides of the  
machine.
25. Apparatus in accordance with at least one of the preceding claims,  
characterised in that the measuring device (10) is attached to a  
beam (13) which preferably projects in the vertical direction or  
transverse to the web running direction into the machine, in  
particular into the dryer section of a paper making machine.
26. Apparatus in accordance with at least one of the preceding claims,  
characterised in that the measuring device (10) is movable beneath  
the machine, in particular in the cellar of a dryer section of a paper  
making machine.
27. Apparatus in accordance with at least one of the preceding claims,

characterised in that a protective device is provided which protects the measuring device (10), in particular from downwardly falling articles, and which is preferably formed by a scraper (44) and/or a sheet metal shield (46).

28. Apparatus in accordance with at least one of the preceding claims, characterised in that an electrical, pneumatic and/or hydraulic drive is provided for the measuring device (10).

29. Apparatus in accordance with at least one of the preceding claims, characterised in that the measuring device (10) is manually movable.

30. Apparatus in accordance with the preamble of claim 1, characterised in that the measuring device (10) is rotatable about an axis for the detection of data relating to at least one measured parameter at a plurality of measurement locations.

31. Apparatus for determining characteristics of a running material web (11) and/or of a machine for its manufacture and/or refinement, in particular for use in paper making machines, preferably in dryer sections of paper making machines, in particular in accordance with any one of the preceding claims, comprising at least one measuring device (10) which has at least two degrees of freedom of movement respectively corresponding to a rotary movement or a linear movement for the detection at a plurality of measurement locations of data relating to at least one measured parameter and is guided such that it is movable along

two longitudinal axes (x, y, z), which preferably extend perpendicular to one another, with it preferably being movable in the longitudinal direction of the material web (11) perpendicular to the direction of movement of the web and/or vertically

32. Method for determining characteristics of a running material web (11) and/or of a machine for its manufacture and/or refinement, in particular for use in paper making machines, preferably in dryer sections of paper making machines, by means of at least one measuring device (10), in particular in accordance with any one of the preceding claims, which has at least two degrees of freedom of movement respectively corresponding to a rotary movement or a linear movement for the detection at a plurality of measurement locations of data relating to at least one measured parameter, in which by means of the measuring device (10) data about at least one of the following measured parameters are detected:

a) measured parameters which relate to a characteristic value of the air, in particular its temperature or moisture, or an air flow, in particular its direction or speed, in the region of the material web or of the machine; and

b) measured parameters such as the thickness, the temperature or the moisture content of the material web or paper web, the temperature and/or the dew point of the dry air used to dry the material web, the temperature prevailing at or in the region of the surface of the dryer cylinder of a paper making machine, the permeability at dryer sieves, the speed of air flows present in particular at the surface of dryer sieves or the air humidity at the

particular at the surface of dryer sieves or the air humidity at the individual machine components or at certain locations of the material web.

1/3

FIG. 1


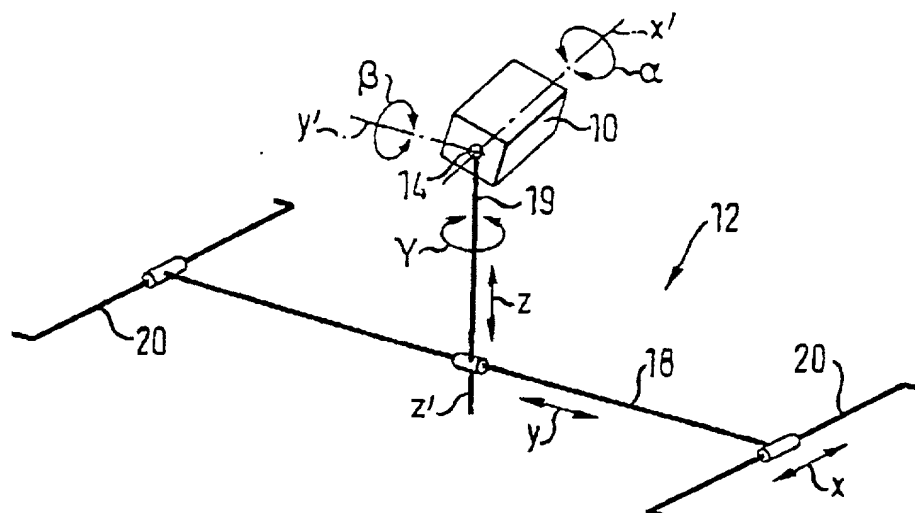


FIG. 2



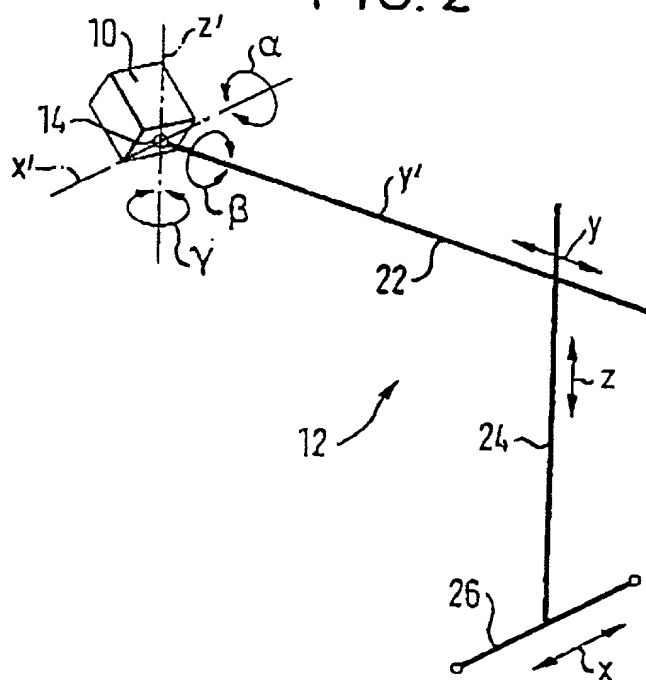

2/3

FIG. 3



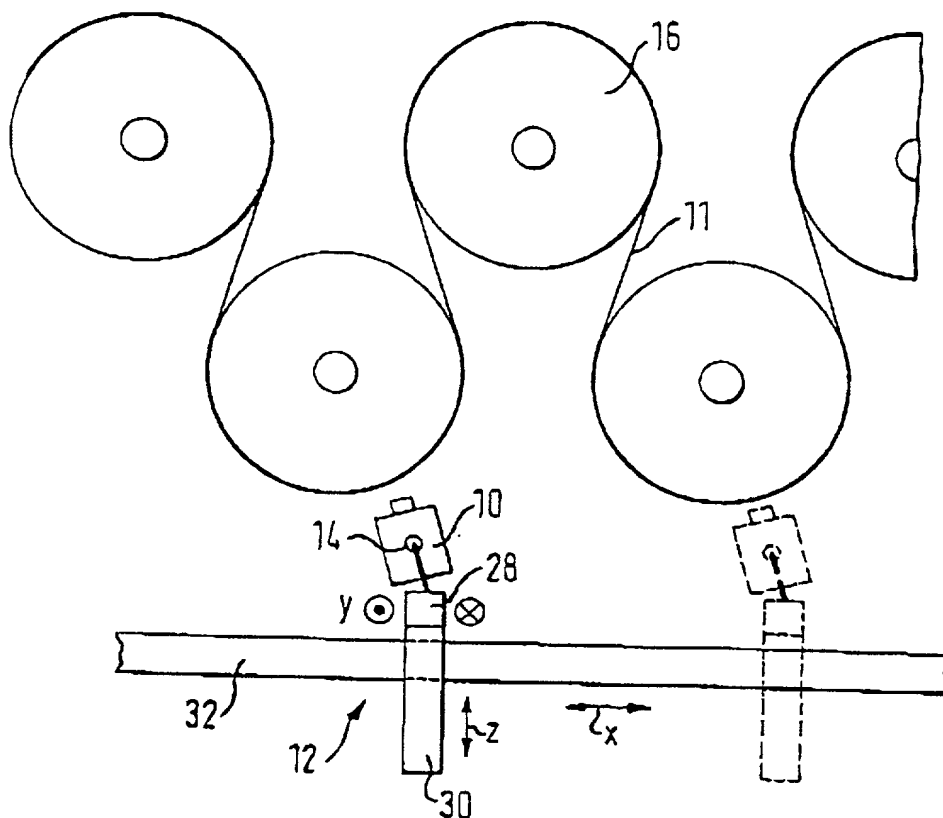


FIG. 4

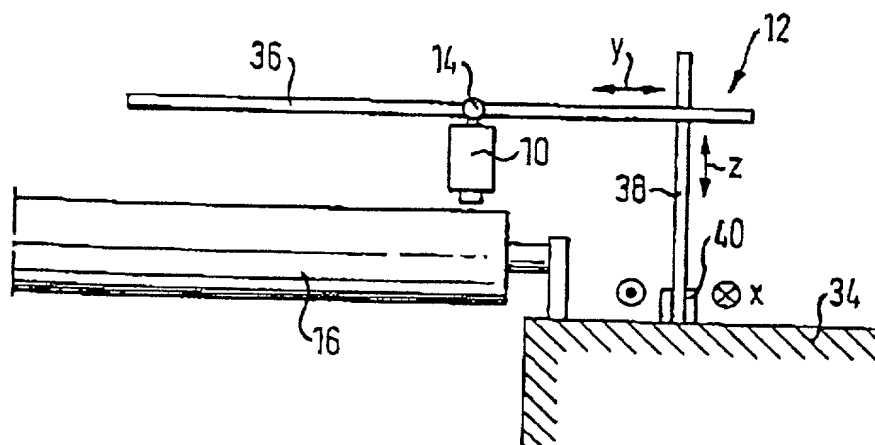

3/3

FIG. 5

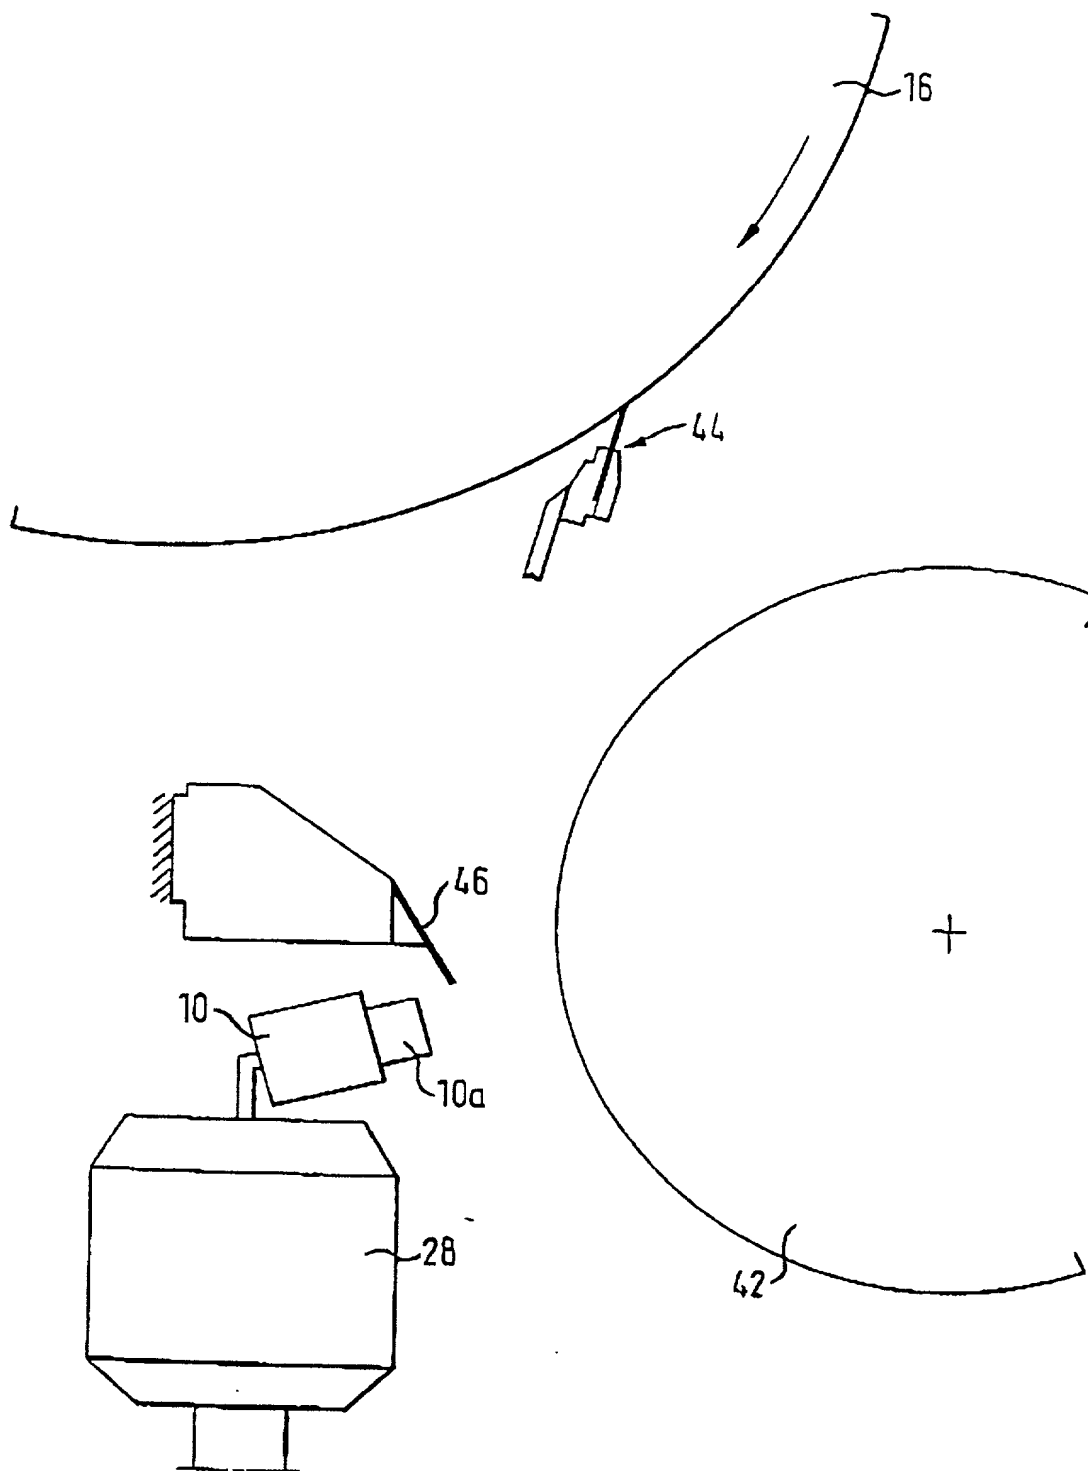

V2670 US  
PC 10877 D10115

**Declaration and Power of Attorney For Utility or Design Patent Application**  
Erklärung für Patentanmeldungen zur Gebrauchseignung und Entwicklung  
mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

daß mein Wohnsitz, meine Postanschrift und meine Staatsangehörigkeit den im nachstehenden nach meinem Namen aufgeführten Angaben entsprechen, daß ich nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent für die Erfindung mit folgendem Titel beantragt wird:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**VORRICHTUNG ZUM BESTIMMEN VON EIGENSCHAFTEN EINER LAUFENDEN MATERIALBAHN**

**DEVICE FOR DETERMINING THE CHARACTERISTICS OF A RUNNING MATERIAL WEB**

deren Beschreibung hier beigefügt ist, es sei denn (in diesem Falle Zutreffendes bitte ankreuzen), diese Erfindung

the specification of which is attached hereto unless the following box is checked:

☒ wurde angemeldet am 14 MÄRZ 2000  
unter der US-Anmeldenummer \_\_\_\_\_  
und wurde am 14 September 2001 abgeändert (falls zutreffend)  
oder

☒ was filed on MARCH 14, 2000 as  
United States Application Number \_\_\_\_\_  
and was amended on September 14, 2001 (if applicable)  
or,

unter der PCT internationalen Anmeldungsnummer  
PCT/EP00/02250 und wurde am 14 FEBRUAR 2001 abgeändert  
(falls zutreffend).

PCT International Application Number PCT/EP00/02250  
and was amended on FEBRUARY 14, 2001 (if applicable).

Ich bestätige hiermit, daß ich den Inhalt der oben angegebene Patentanmeldung, einschließlich der Ansprüche, die eventuell durch einen oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und verstanden habe.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37, Code of Federal Regulations, § 1.56 von Belang sind.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title 35, US-Code, § 119 (a)-(d), bzw. § 365(b) aller unten aufgeführten Auslandsanmeldungen für Patente oder Erfinderurkunden, oder § 365(a) aller PCT internationalen Anmeldungen, welche wenigstens ein Land ausser den Vereinigten Staaten von Amerika benennen, und habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen für Patente bzw. Erfinderurkunden oder PCT internationale Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung, für welche Priorität beansprucht wird, vorangeht.

I hereby claim foreign priority under Title 35, United States Code §119 (a-d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, listed below. I have also identified below, by checking the "No" box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Applications Frühere ausländische Anmeldungen			Priority Claimed Prioritätsanspruch	
<u>199 11 395.5</u>	<u>GERMANY</u>	<u>15/MARCH/1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Nummer)	(Land)	(Tag/Monat/Jahr der Anmeldung)	Ja	Nein
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Nummer)	(Land)	(Tag/Monat/Jahr der Anmeldung)	Ja	Nein

☐ Zusätzliche einstweilige Anwendungsnummern sind im Prioritätsanhang aufgeführt.

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

## German Language Utility or Design Patent Application Declaration

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

(Application Number)  
(Aktenzeichen)

(Application Number)  
(Aktenzeichen)

(Application Number)  
(Aktenzeichen)

- ☐ Zusätzliche einstweilige Anmeldeungsnummern sind im ergänzenden Prioritätsanhang aufgeführt.

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

(Application No.)  
(Aktenzeichen)

(Day/Month/Year Filed)  
(Tag/Monat/Jahr eingereicht)

(Application No.)  
(Aktenzeichen)

(Day/Month/Year Filed)  
(Tag/Monat/Jahr eingereicht)

- ☐ Zusätzliche USA oder internationale Anmeldeungsnummern sind im ergänzenden Prioritätsanhang aufgeführt.

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachte Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und daß derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patentes gefährden können.

Hiermit bevollmächtigt der Unterzeichnete den hierin genannten entweder USA-Anwalt oder Stellvertreter, in der Abwesenheit einer direkten Verständigung zwischen den USA-Anwalt oder Stellvertreter und dem Unterzeichneten Anweisungen, die der der Anmeldung betreffend dem Patent und Warenzeichen Amt zugestellt werden, von entweder seinem ausländischen Patentvertreter oder Stellvertreter der Gesellschaft anzunehmen und auszuführen. Sollte sich das Personal ändern, von dem Anweisungen angenommen werden mögen, dann wird der hierin genannte USA-Anwalt oder Stellvertreter entsprechend von dem Unterzeichneten benachrichtigt.

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Day/Month/Year Filed)  
(Tag/Monat/Jahr der Anmeldung)

(Day/Month/Year Filed)  
(Tag/Monat/Jahr der Anmeldung)

(Day/Month/Year Filed)  
(Tag/Monat/Jahr der Anmeldung)

- ☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Status)  
(patentiert, schwebend, aufgegeben)  
(patented, pending, abandoned)

(Status)  
(patentiert, schwebend, aufgegeben)  
(patented, pending, abandoned)

- ☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

# German Language Utility or Design Patent Application Declaration

**VERTRETUNGSVOLLMACHT:** Als benannter Erfinder beauftrage ich hiermit den sich mit der Kundennummer befassenden Patentanwalt (Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt und weise an, dass alle Korrespondenz mit dieser Kundennummer adressiert wird.

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

**KUNDENNUMMER 7055**

**CUSTOMER NUMBER 7055**

Die ernannten Patentanwälte sind zur Zeit:

The appointed attorneys presently include:

8  
Neil F. Greenblum Reg. No. 28,394  
Bruce H. Bernstein Reg. No. 29,027  
Arnold Turk Reg. No. 33,094  
James L. Rowland Reg. No. 32,674

Stephen M. Roylance Reg. No. 31,296  
Leslie J. Paperner Reg. No. 33,329  
William Pieprz Reg. No. 33,630  
William E. Lyddane Reg. No. 41,568

Address: **Greenblum & Bernstein, P.L.C.**  
1941 Roland Clarke Place  
Reston, VA 20191

Telefongespräche bitte richten an:

Direct Telephone Calls to:

**Greenblum & Bernstein, P.L.C.**  
(703) 716-1191

Vor- und Nachname des einzigen oder ersten Erfinders:  
Markus OECHSLE

Full name of sole or first inventor  
Markus OECHSLE

Unterschrift des Erfinders

Datum

2001-11-15

Inventor's signature

Date

2001-11-15

Wohnsitz  
Bartholomä, Deutschland

Residence  
Bartholomä, Germany

Staatsangehörigkeit  
Deutschland

Citizenship  
Germany

Postanschrift  
Falkenbergweg 23, D-73566 Bartholomä, Deutschland

Post Office Address  
Falkenbergweg 23, D-73566 Bartholomä, Germany

Vor- und Nachname des zweiten Miterfinders (falls zutreffend)  
Frank WEGEHAUPT

Full name of second joint inventor, if any  
Frank WEGEHAUPT

Unterschrift des zweiten Erfinders

Datum

01-11-15

Second Inventor's Signature

Date

01-11-15

Wohnsitz  
Böhmenkirch, Deutschland

Residence  
Böhmenkirch, Germany

Staatsangehörigkeit  
Deutschland

Citizenship  
Germany

Postanschrift  
Schubartstrasse 26, D-89558 Böhmenkirch, Deutschland

Post Office Address  
Schubartstrasse 26, D-89558 Böhmenkirch, Germany

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).